



NOTES:

TRUNCATED DOME PLAN VIEW

1. ALL MATS SHALL BE REPLACEABLE MATS. PLASTIC MATS CAN BE EITHER SURFACE APPLIED OR WET-SET FRAMES THAT ACCEPT THE PLASTIC MATS. (NO PRE-CAST PAVERS, ETC.)
2. WIDTH OF DETECTABLE WARNING AREA SHALL BE A MINIMUM OF 4 FEET AND VARY WITH WIDTH OF RAMP.
3. LENGTH OF DETECTABLE WARNING AREA SHALL BE 2 FEET REGARDLESS OF SECTION WIDTH.
4. DETECTABLE WARNING AREA CAN BE SQUARE WHERE USED IN A CURB RADIUS.
5. DETECTABLE WARNING DOMES SHALL BE ALIGNED ON A SQUARE GRID IN THE PREDOMINANT DIRECTION OF TRAVEL TO PERMIT WHEELS TO ROLL BETWEEN DOMES.
6. DETECTABLE WARNING AREA SHALL BE COLORED YELLOW IN ALL LOCATIONS.

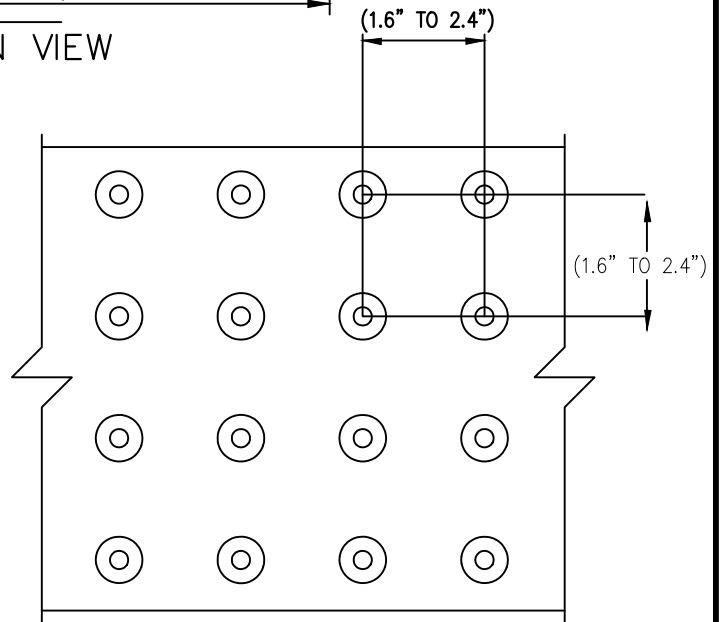

TRUNCATED DOME SPACING



TRUNCATED DOME SECTION

| REVISIONS | |
|-----------|-------------|
| DATE | DESCRIPTION |
| | |
| | |
| | |