



2' WIDE BY 14" DEEP CONC. BAND 3000 PSI
 @ 28 DAYS. BROOM FINISH FLUSH W/
 ASPHALT & PAVERS. CONTROL JOINTS@
 ±5' OC (EQUAL SPACING). PROVIDE 2 #5
 REBAR CONT. W/3" MINIMUM COVER.

3-1/8" X 5-1/2" X 8-1/4" CONC. HOLLAND
 PAVER STONE, 80MM BY GORIA ENTERPRISES.
 COLOR AND PATTERN TO BE SELECTED BY
 OWNERS REPRESENTATIVE. (SAND SWEEPED JOINTS)

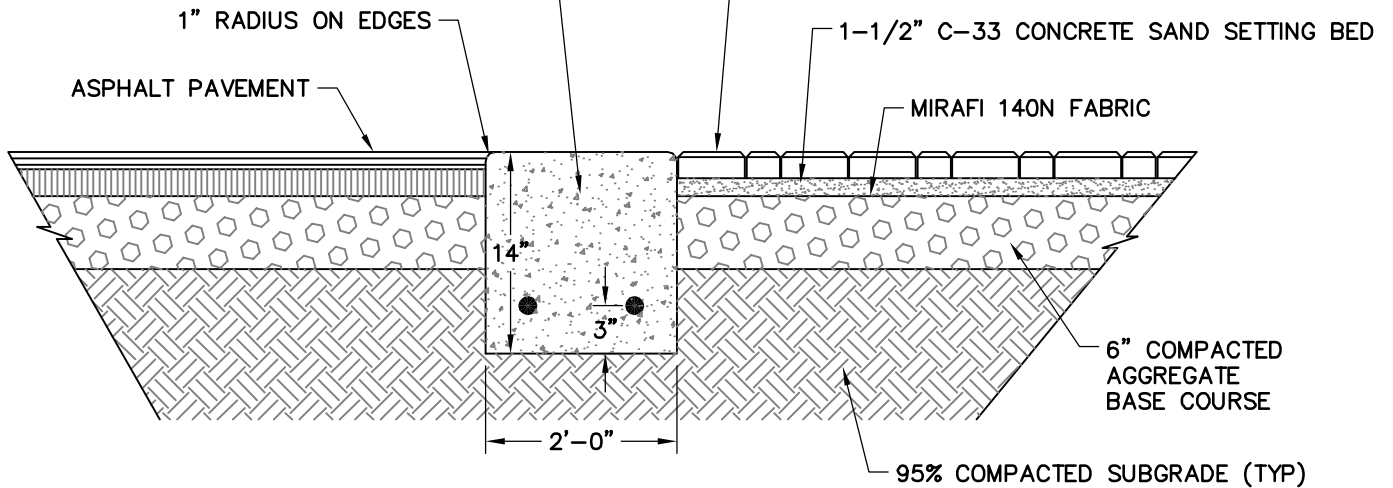

SECTION @ CONCRETE BAND

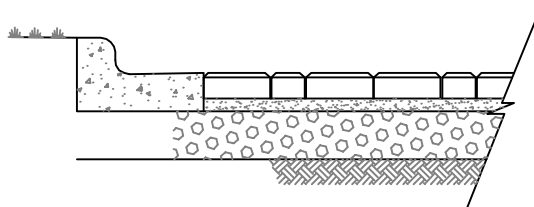

SECTION @ CURB & GUTTER

NOTE:

1. STAMPED CONCRETE OR ASPHALT MAY BE USED IN LIEU OF BRICK PAVERS.

REVISIONS	
DATE	DESCRIPTION

TOWN OF KNIGHTDALE
 STANDARD DETAILS

UNIT PAVER CROSSWALK

STD. NO.

4.11